

Conical shape. Heavy spun aluminum hood with guard.

Coquitlam Centre Mall, British Columbia

Conical seamless acrylic globe, UV resistant.

TGAC: Clear acrylic

TGAO: Opaline acrylic

TGAP: POND acrylic 75% diffusing

Tool-free "Twist-lock" quarter-turn opening system.

"V" groove seamless silicone gasket.

IP66 rated.

"Cyclo-Tech" coated stainless steel hardware.

Slip fits on a 4" (10cm)Ø x 3" (7cm) long tenon.

Optics

Pre-anodized aluminum reflector with a 95% minimum reflection level.

LED
SKY 2-3-3M-4-5


IESNA type II, III, IV or V
Refractor lens.




HID
GR3-GR5
IESNA type III or V
Glass refractor




HID
PL3-PL5
IESNA type III or V
Segmented louvers



HID
RS2-RS3-RS5
IESNA type II, III or V
Segmented reflector with cone



HID
RA3-RA5
IESNA type III or V
Prismatic refractor



Sources

Lamp

4K = High power LED 4000 K (neutral white) ± 150K.

MH = Metal halide

HPS = High pressure sodium

S17=medium base

S23, S28 & S18=mogul base

Electric

HID: High power factor of 90%. Tool-free removable tray with "quick" connectors.

LED: Auto-adjustable driver, Class 1, min. of 90% power factor. Tool-free removable tray with "quick" connectors.

120, 208, 240, 277 or 347 volts available

Consult factory for other source and lallast types

Finish / Options

5 mils/127 microns polyester super durable powder coating.

A wide variety of RAL colors are available in textured (TX) or smooth (SM) finish.

Options

DIM: Dimmable driver 0-10 volts

HS: House side shield

PC: Button type photocell

TP: Tamperproof hardware

R30: Reducer for 3" (7cm) Ø tenon.



TRIKA


CT23T4-GCT03
EPA: 2.18 ft²
Weight: 31 lbs - 14 kg




Suitable for wet locations

ORDERING TEMPLATE: Luminaire Globe Optic Watt Lamp Volt Fitter Guard Options Color

LED

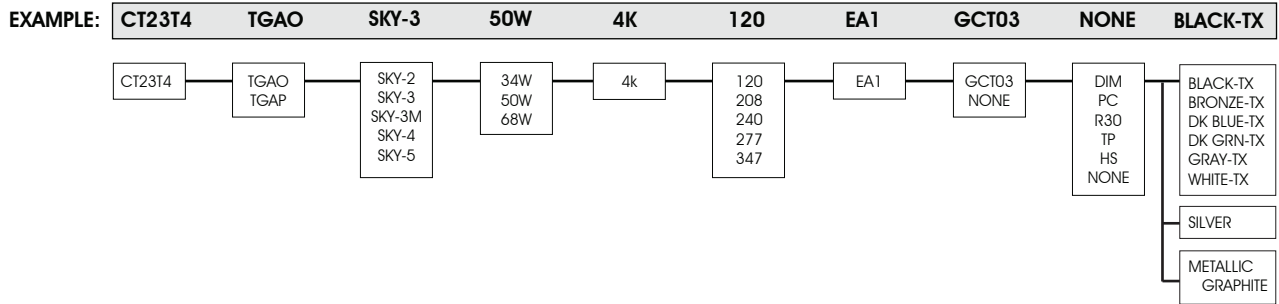

HID

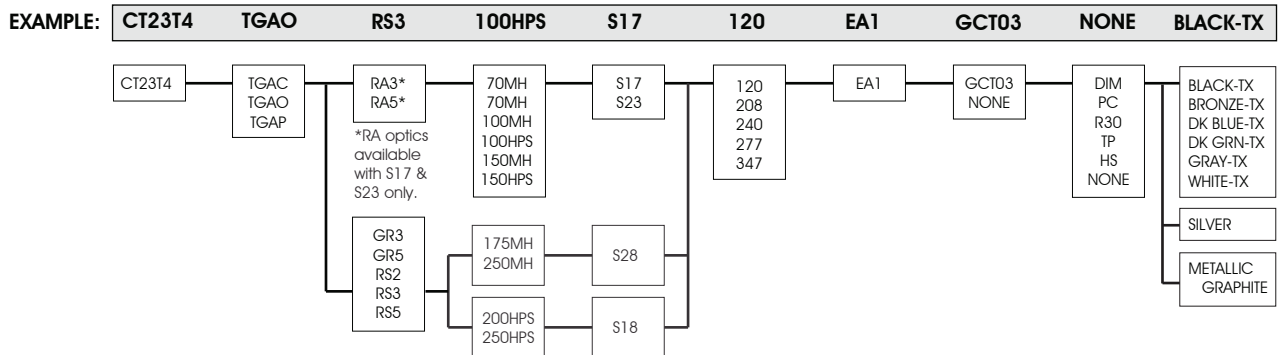

Luminaire

